

2835 LED Zig Zag Tape

360 degree bendable tape light



One BIN only
for a CCT range



Lifetime



Certified



Certified



Certified



Warranty



Ra Available

IP Grade Available



Features




- 360 degree bendable, both vertically and horizontally
- Excellent for low profile channel letters as 1" deep
- Silicone coated (IP65) & indoor (IP22) are available
- Epistar chips, LM-80
- Cuttable every 3 LEDs
- 3M double sided tape for easy installation
- cULus Listed, 2 years warranty

2835 LED Zig Zag Tape

360 degree bendable tape light

Specifications

LED Type	SMD 2835	Dimmable	Yes (compatible with BV311 RF dimmer)
LED Q'ty/m	72pcs	IP grade	IP22 (IP65 available upon request)
Input Voltage	12VDC Constant Voltage	Installation	3M™ double sided tape
Power	7.2 W/m	Working Temperature	-40~+80 °C
Cutting length	41.6mm 3 LEDs	Max run	2 meters (two feeds)
Strip Width	6.5mm	Certification	E354137 cULus Listed, CE, RoHs
Viewing Angle	120°	Warranty	2 years [Ⓞ]

Order Code	CCT/ Color	CRI	Lumen/M [Ⓞ]
FS-2835C-60-12-30K	 2900-3000K	80+	450
FS-2835C-60-12-50K	 5000-5300K	80+	450
FS-2835C-60-12-65K	 6000-6500K	80+	490

Note[Ⓞ]: Contact Blueview for exact warranty period and policy

Note[Ⓞ]: Lumen output are measured according to PMS-80, with a tolerance of +/- 5%

Note[Ⓞ]: Standard package: 5m/roll

Order Code


Model	Quality level	LED Q'ty/M	Input voltage	CCT/Color
FS	2835C	72	12	25K
FS-IP22 FSWS-IP65	2835C-2 yrs warranty		12-12V DC	view table above for options

2835 LED Zig Zag Tape


360 degree bendable tape light

Dimension

Unit:mm[in]

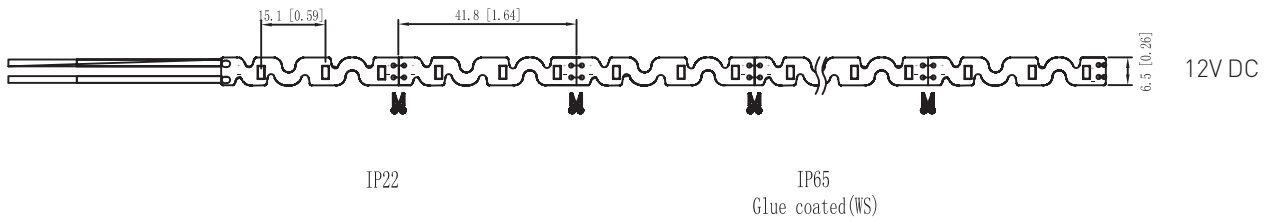

Package

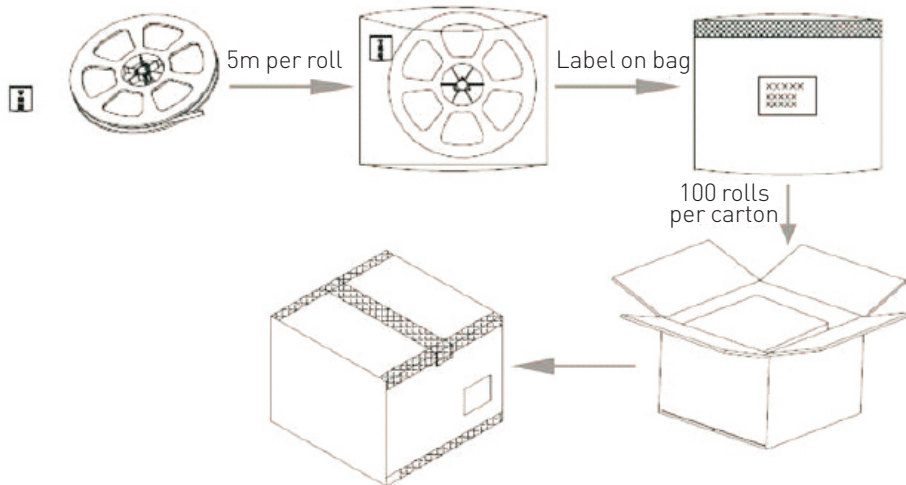

Packing Info

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
FS-2835C-72	12 (±10%) kgs	15 kgs	100 rolls	550*400*340mm